

TRUCK WHEEL BALANCER

CEMB USA

C206



**Digital Mobile Wheel Balancer
for Heavy-Duty truck and bus tires**

Visit our website to see our complete
range of wheel balancers
and other products



TBC

Heavy-Duty
Trucks, Buses and
Cars

2D

Automatic Distance
and Diameter

MWL

Maximum Weight
Limit 550 LBS

DV

Dual Voltage
Mobile 12VDC
Garage 110VAC



CEMB

Established 1946
USA since 1969

WWW.CEMB-USA.COM

TRUCK WHEEL BALANCER



CEMB C206

BALANCING MACHINES

Mobile digital hand spin wheel balancer for Heavy-Duty trucks, buses, cars and light trucks

FEATURES

- Mobile balancer capable of balancing trucks, buses and cars.
- Hand spin with reduction gears for easy lifting and spinning
- Portable for mobile service when 12 Volts available
- Dual voltage power supply (12VDC or 110VAC)
- Direct selection Ounce or Gram
- Direct weight location program (no repositioning of stick-on weights)
- Automatic distance and diameter entry (2D)

STANDARD (all TRUCK CEMB balancers)

- One button split and hidden weight program
- Optimization program for compensation of rim and tire unbalance
- "Static" program - plus 5 ALU programs for alloy, PAX or special shaped rims

STANDARD ACCESSORIES

- Standard car adaptor set with three cones, wingnut and hand wheel for wheels with a center hole from 1.69" (43mm) to 4.33" (110mm)
- 2 truck cones from 7.95" (202mm) to 8.70" (221mm)
- 2 spacer discs
- Rim width gauge for measuring wheel width
- 40mm threaded shaft
- Truck weight pliers

OPT. TRUCK ACCESSORIES

- SR215/2 truck wheel stud adaptor kit
- Dayton wheel adaptor 20" & 22.5"
- Dayton wheel adaptor 22" & 24.5"
- Cone V Europe 11.06" (281mm)
- Accessory rack

OPT. CAR ACCESSORIES

- RL cup (8.11" or 206mm for alloy rims (includes no-mar ring)
- SR-USA adaptor (for lug centric wheels)
- Universal bolt pattern adaptor (for wheels with 3-4-5 holes or w/out center hole)


TECHNICAL SPECIFICATIONS

- Power supply 110VAC or 12VDC
- Car balancing speed < 100 rpm
- Truck balancing speed < 70 rpm
- Car balancing accuracy < 1 g
- Truck balancing accuracy < 10 g
- Rim diameter 10" - 30"
- Rim width 1.5" - 20"
- Max wheel weight 550 lbs (250 Kg)
- Car average cycle time 8 seconds
- Truck average cycle time 20 seconds
- Operating temperature 32° -113°F (0° - 45°C)
- Shipping dimensions (L 44" x W 44" x H 44")
- Gross shipping weight 371 lbs



Manufacturer reserves the right to make any and all alterations it may consider suitable without notice

BALANCER FOOT PRINT

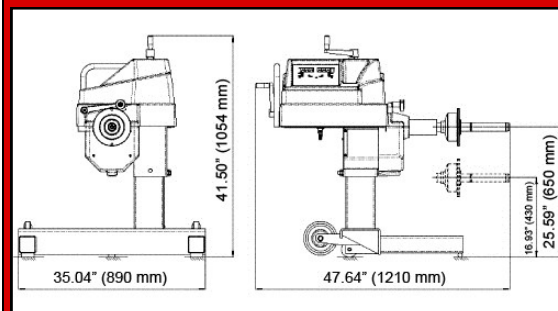

CEMB TECHNOLOGIES



All parts used to manufacture our machines are of the highest quality available. Only in this way is it possible to maintain constant accurate balancing over time.



Sales and technical support network in over 85 countries.

A team of specialists at the customer's service.

CEMB USA

BL Systems, Inc.

2873 Ramsey Road • Gainesville, GA 30501
Toll free 877-259-4335 • Office 678-717-1050
Fax 678-717-1056 • sales@cemb-usa.com

DISTRIBUTED BY

Related Models C212 • C218

CATC206-1

WWW.CEMB-USA.COM