

TRUCK WHEEL BALANCER

CEMB^{USA}

C218



Video Wheel Balancer for Heavy-Duty truck and bus tires

Visit our website to see our complete range of wheel balancers and other products



TBC

Heavy-Duty Trucks, Buses and Cars

2D

Automatic Distance and Diameter

MWL

Maximum Weight Limit 550 LBS

PWL

Pneumatic Wheel Lift

EMS

Radial Runout Sonar

WG

Wheel Guard



CEMB

Established 1946
USA since 1969

WWW.CEMB-USA.COM

TRUCK WHEEL BALANCER



Video wheel balancer for Heavy-Duty trucks, buses, cars and light trucks

C218

FEATURES

- Fully automatic cycle
- Pneumatic stationary brake for mounting and counterweight application
- Pneumatic wheel lift (air bag type) for accurate centering of wheels
- Direct selection Ounce or Gram
- Direct weight location program (no repositioning of stick-on weights)
- Automatic distance and diameter entry (2D)
- Radial Sonar Runout
- Wheel guard

STANDARD (all TRUCK CEMB balancers)

- One button split and hidden weight program
- Optimization program for compensation of rim and tire unbalance
- "Static" program - plus 5 ALU programs for alloy, PAX or special shaped rims

STANDARD ACCESSORIES

- Standard car adaptor set with three cones, wingnut and hand wheel for wheels with a center hole from 1.69" (43mm) to 4.33" (110mm)
- 2 truck cones from 7.95" (202mm) to 8.70" (221mm)
- 2 spacer discs
- 2 pegs for storage
- Rim width gauge for measuring wheel width
- 40mm threaded shaft
- Truck weight pliers
- Accessory rack

OPT. TRUCK ACCESSORIES

- SR215/2 truck wheel stud adaptor kit
- Dayton wheel adaptor 20" & 22.5"
- Dayton wheel adaptor 22" & 24.5"
- Cone V Europe 11.06" (281mm)

OPT. CAR ACCESSORIES

- RL cup (8.11" or 206mm for alloy rims (includes no-mar ring)
- SR-USA adaptor (for lug centric wheels)
- Universal bolt pattern adaptor (for wheels with 3-4-5 holes or w/out center hole)


TECHNICAL SPECIFICATIONS

- Power supply 110VAC
- Car balancing speed < 100 rpm
- Truck balancing speed < 70 rpm
- Car balancing accuracy < 1 g
- Truck balancing accuracy < 10 g
- Rim diameter 10" - 30"
- Rim width 1.5" - 20"
- Max wheel weight 550 lbs (250 Kg)
- Car average cycle time 8 seconds
- Truck average cycle time 20 seconds
- Operating temperature 32° -113°F (0° - 45°C)
- Shipping dimensions (L 72" x W 48" x H 59")
- Gross shipping weight 575 lbs



Manufacturer reserves the right to make any and all alterations it may consider suitable without notice

BALANCER FOOT PRINT

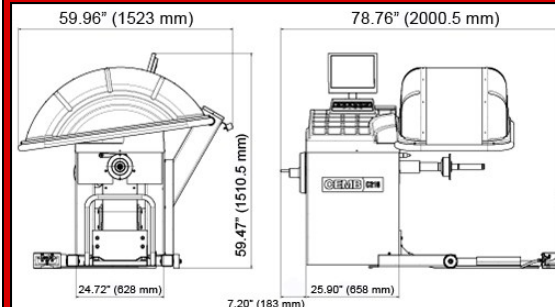

CEMB TECHNOLOGIES



All parts used to manufacture our machines are of the highest quality available. Only in this way is it possible to maintain constant accurate balancing over time.



Sales and technical support network in over 85 countries.

A team of specialists at the customer's service.

CEMB USA

BL Systems, Inc.

2873 Ramsey Road • Gainesville, GA 30501
Toll free 877-259-4335 • Office 678-717-1050
Fax 678-717-1056 • sales@cemb-usa.com

DISTRIBUTED BY

Related Models C202SE • C212

CATC218-1

WWW.CEMB-USA.COM